

Quick-Coupling Valves


Convenient water access in potable and non-potable systems

Features

- Industrial-strength brass quick-coupling valves for convenient water access in potable and non-potable systems.
- Rugged, red brass construction for long life and reliable performance.
- Reliable leak proof operation with strong corrosion-resistant stainless steel spring.
- Optional locking cover on models 33-DLRC, 44-LRC, 5-LRC, 33-DNP, 44-NP, and 5-NP (use * 2049 key to unlock). Metal cover on model 7 only
- One-piece body design (models 3-RC, 5-RC and 7)
- Two-piece body design for easy servicing (models 33-DLRC, 33-DRC, 44-LRC, 44-RC, 33-DNP, and 44-NP)
- Thermoplastic rubber cover for durability
- 33-DNP, 44-NP, and 5-NP covers marked with "Do Not Drink!" warnings in English and Spanish
- Three-year trade warranty



Quick Coupling Valves

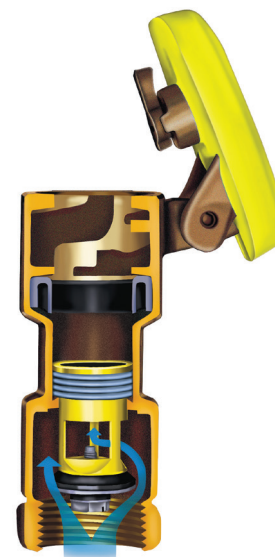

Quick-Coupling Valve Cutaway



33-DNP, 44-NP



7



3-RC, 5-RC,
5-LRC



33-DRC, 33-DLRC,
44-RC, 44-LRC

Specifications

- Pressure: 5 to 125 psi (0.35 to 8.63 bar)
- Flow: 10 to 125 gpm (2.27 to 28.38 m³/h; 37.8 to 473 l/m)
- 33-DNP, 44-NP and 5-NP flow: 10 to 70 gpm (2.27 to 15.89 m³/h; 37.8 to 265 l/m)

Models

- 3-RC: 3/4" (20/27) Rubber Cover, 1-Piece Body
- 33-DRC: 3/4" (20/ 27) Double Track Key Lug, Rubber Cover, 2-Piece Body
- 33-DLRC: 3/4" (20/27) Double Track Key Lug, Locking Rubber Cover, 2-Piece Body
- 44-RC: 1" (26/34) Rubber Cover, 2-Piece Body
- 44-LRC: 1" (26/34) Locking Rubber Cover, 2-Piece Body
- 5-RC: 1" (26/34) Rubber Cover, 1-Piece Body
- 5-LRC: 1" (26/34) Locking Rubber Cover, 1-Piece Body
- 7: 1 1/2" (40/49) Metal Cover, 1-Piece Body
- 5-RC-BSP: 1" (26/34) Rubber Cover, 1-Piece Body, BSP threaded

- 5-LRC-BSP: 1" (26/34) Locking Rubber Cover, 1-Piece Body, BSP threaded
- 33-DNP: 3/4" (20/27) Non-potable, Purple Locking Rubber Cover, 2-Piece Body
- 44-NP: 1" (26/34) Non-potable, Purple Locking Rubber Cover, 2-Piece Body
- 5-NP: 1" (26/34) Non-potable, Purple Locking Rubber Cover, 1-Piece Body

Note: For non-US applications, it is necessary to specify NPT or BSP thread type

Dimensions (height)

- 3-RC: 4 1/4" (10.8 cm)
- 33-DRC: 4 3/8" (11.1 cm)
- 33-DLRC: 4 5/8" (11.7 cm)
- 44-RC: 6" (15.2 cm)
- 44-LRC: 6" (15.2 cm)
- 5-RC: 5 1/2" (14.0 cm)
- 5-LRC: 5 1/2" (14.0 cm)

- 7: 5 3/4" (14.6 cm)
- 33-DNP: 4 3/8" (11.1 cm)
- 44-NP: 6" (15.2 cm)
- 5-NP: 5 1/2" (14.0 cm)

How To Specify

33 - DLRC

Model	Cover	Thread
33	RC	Blank: NPT
44	DRC	BSP: 5-RC, 5-LRC only
5	DLRC	
7	LRC	
	DNP	
	NP	

Note: This specifies a 33-DLRC valve: 3/4" (20/27) quick coupling type; optional locking cover.

Specifications

33-DNP, 44-NP - Two Piece Quick Coupling Valve (Non-Potable)

The quick coupling valve shall be a two piece type capable of having a discharge rate of ___ units with a pressure loss not to exceed ___ units.

The valve shall be constructed of red brass and shall have a purple, thermoplastic, locking rubber cover with molded-in warnings of "DO NOT DRINK" in English and Spanish, for use on systems using non-potable water.

The valve shall be opened and closed by a brass key of the same manufacturer having a ___" (MNPT) and ___" (FNPT) outlet. The valve throat shall have a key-way with detent positions for regulating water flow.

QUICK COUPLING VALVES - 3-RC, 5-RC, 5-LRC, 7 - One Piece Quick Coupling Valve

The quick coupling valve shall be a one-piece type capable of having a discharge rate of ___ units with a pressure loss not to exceed ___ units.

The valve body shall be constructed of red brass. The cover shall be a durable, protective self-closing rubber cover. When so specified, the cover shall be a locking rubber cover (LRC).

The valve shall be opened and closed by a brass key of the same manufacturer having a ___" (MNPT) and ___" (FNPT) outlet. The valve throat shall have a key-way with detent positions for regulating water flow.

* Cover Key - Model 2049

- Locks and unlocks the optional locking cover (LRC) on quick coupling valves.
- Operates the valve marker compression lock.

33-DRC, 33-DLRC, 44-RC, 44-LRC - Two Piece Quick Coupling Valve


The quick coupling valve shall be a two piece type capable of having a discharge rate of ___ units with a pressure loss not to exceed ___ units.

The valve body shall be constructed of red brass. The cover shall be a durable, protective self-closing rubber cover. When so specified, the cover shall be a locking rubber cover (LRC).

The valve shall be opened and closed by a brass key of the same manufacturer having a ___" (MNPT) and ___" (FNPT) outlet. The valve throat shall have a key-way with detent positions for regulating water flow.

Quick Coupling Valve Keys

TOP PIPE THREADS					
VALVE	KEY		MALE		FEMALE
3-RC	33DK	3/4"	19 mm	1/2"	13 mm
33-DRC	33DK	3/4"	19 mm	1/2"	13 mm
33-NP	33DK	3/4"	19 mm	1/2"	13 mm
44-NP	44K	1"	25 mm	3/4"	19 mm
44-RC	44K	1"	25 mm	3/4"	19 mm
5-RC	55K1	1"	25 mm	—	—
5-NP	55K1	1"	25 mm	—	—
7	7K	1 1/2"	38 mm	—	—

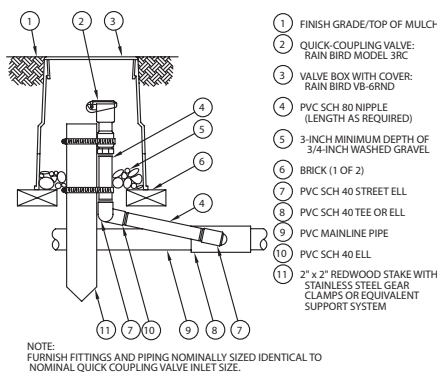

Quick-Coupling Valves Pressure Loss (psi)

Flow	3-RC	33-DRC 33-DLRC 33-DNP	44-RC 44-LRC 44-NP	5-RC 5-LRC 5-NP	7
gpm	3/4"	3/4"	1"	1"	1 1/2"
10	1.8	2	-	-	-
15	4.7	4.3	2.2	-	-
20	7.2	7.6	4.4	-	-
30	-	-	11.5	4.1	-
40	-	-	-	7.3	-
50	-	-	-	11	1.7
60	-	-	-	15.7	2.5
70	-	-	-	21.5	3.6
80	-	-	-	-	4.9
100	-	-	-	-	8.4
125	-	-	-	-	14

Quick-Coupling Valves Pressure Loss (bar) METRIC

Flow	3-RC	33-DRC 33-DLRC 33-DNP	44-RC 44-LRC 44-NP	5-RC 5-LRC 5-NP	7
m³/h	l/m	1.9 cm	1.9 cm	2.5 cm	2.5 cm 3.8 cm
2.3	38	0.12	0.12	-	-
4	67	0.41	0.42	0.23	-
5	83	0.57	0.62	0.40	-
6	100	-	0.62	-	-
7	117	-	0.83	0.30	-
8	133	-	-	0.40	-
9	150	-	-	0.50	-
10	167	-	-	0.61	-
12	200	-	-	0.85	0.13
14	233	-	-	1.15	0.18
16	267	-	-	1.50	0.25
22	367	-	-	-	0.54
28	473	-	-	-	0.97

*Loss values are with flow control fully open.

1) Rain Bird recommends flow rates in the supply line not to exceed 7.5 ft/sec (2.3 m/s) in order to reduce the effects of water hammer.

2) For flows below 5 gpm (1 m³/h; 32 l/s) Rain Bird recommends use of upstream filtration to prevent debris from collecting below the diaphragm.

3) For flows below 10 gpm (2 m³/h; 63 l/s) Rain Bird recommends that the flow control stem be turned down two full turns from the fully open position. PRS-B module is recommended for use only at flow rates in areas below solid line.

Rain Bird Corporation
 6991 East Southpoint Rd.
 Tucson, AZ 85756
 Phone: (520) 741-6100

Rain Bird Corporation
 970 West Sierra Madre Avenue
 Azusa, CA 91702
 Phone: (626) 812-3400

The Intelligent Use of Water™
www.rainbird.com