



Approx. Fertilization time (minutes)							
Pressure loss In/Outlet	Tank capacity						
	20 Liters	30 liters	60 liters	90 liters	120 liters	220 liters	300 liters
BAR	20-25	30-40	60-75	105-120	120-135	225-270	330-390
0.05	15-20	20-30	45-60	75-90	90-120	150-165	225-255
0.1	10-15	15-20	30-45	45-60	60-90	105-135	165-195
0.2	6-10	10-15	20-30	30-45	45-75	75-90	90-105
0.4	5 gallons	8 gallons	15 gallons	24 gallons	32 gallons	58 gallons	79 gallons
PSI	5-6.6	8-10.5	15-19	28-32	32-36	60-70	87-103
0.7	4-5	5-8	12-15	20-24	24-32	40-44	60-67
1.5	2.6-4	4-5	8-12	12-16	15-24	28-36	44-52
3	1.5-2.6	2.6-4	5-8	8-12	12-20	20-24	24-28
6							

Model	ØD1 (in)	Volume		H		L		Shipping Weight	
		(lt)	(gal)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
F515	16	20	5.28	525	20.67	406	15.98	18	40
F520	16	30	7.93	600	23.62	406	15.98	23	51
F530	20	60	15.85	690	27.17	495	19.49	29	64
F540	20	90	23.78	831	32.72	497	19.57	37	82
F550	20	120	31.70	1010	39.76	495	19.49	41	90
F560	20	120	31.70	740	29.13	743	29.25	42	93
F570	20	220	58.12	735	28.94	1323	52.09	51	112
F570V	25	220	58.12	1013	39.88	610	24.02	60	132
F580	25	300	79.20	970	38.20	1510	59.45	115	254



Model F515 – F550,
& F570V

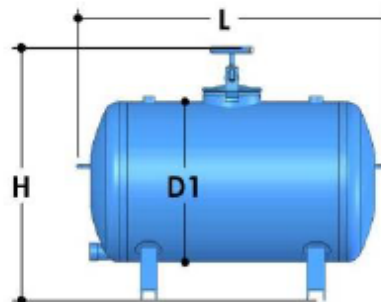

Model F560 - F580