
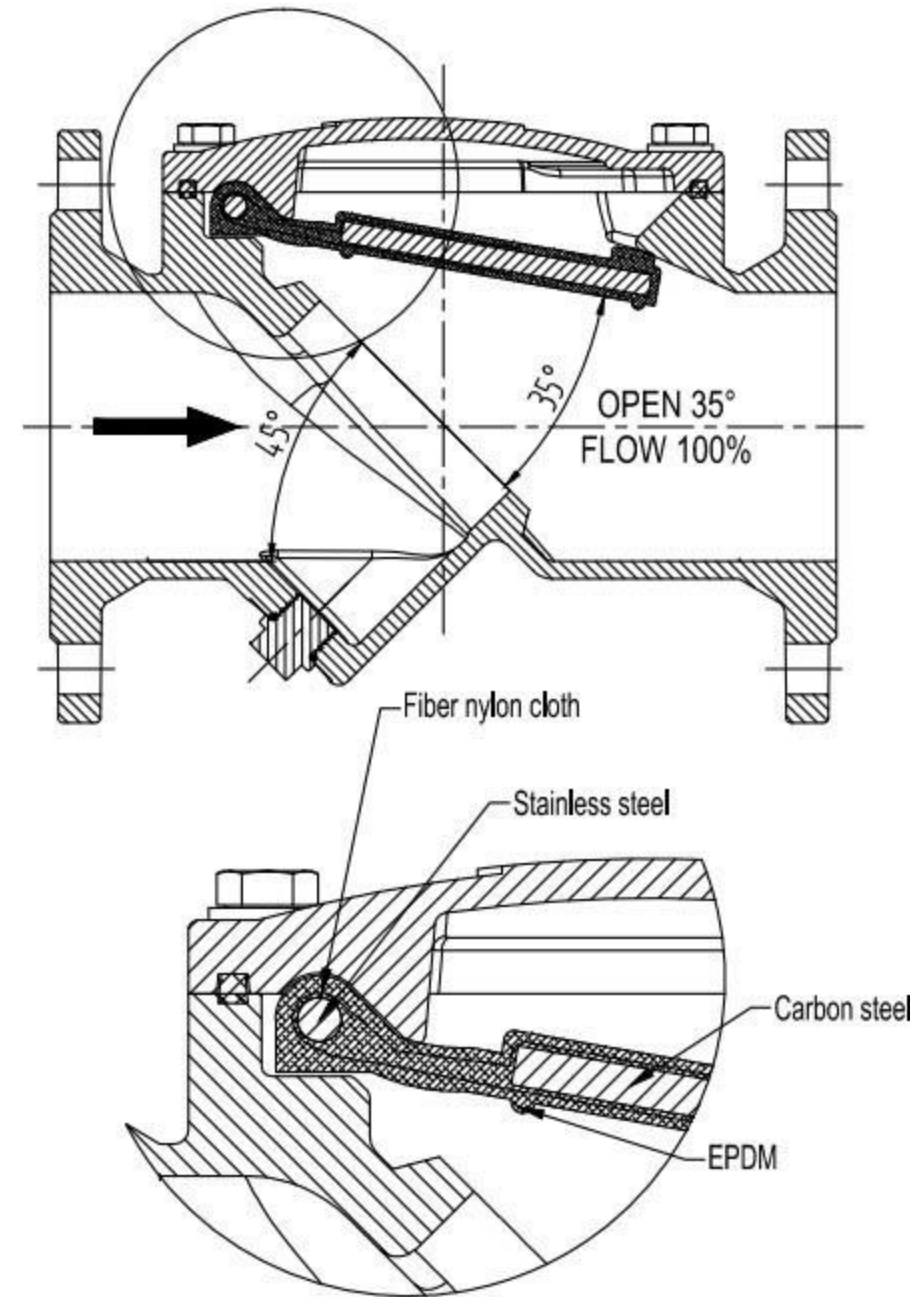


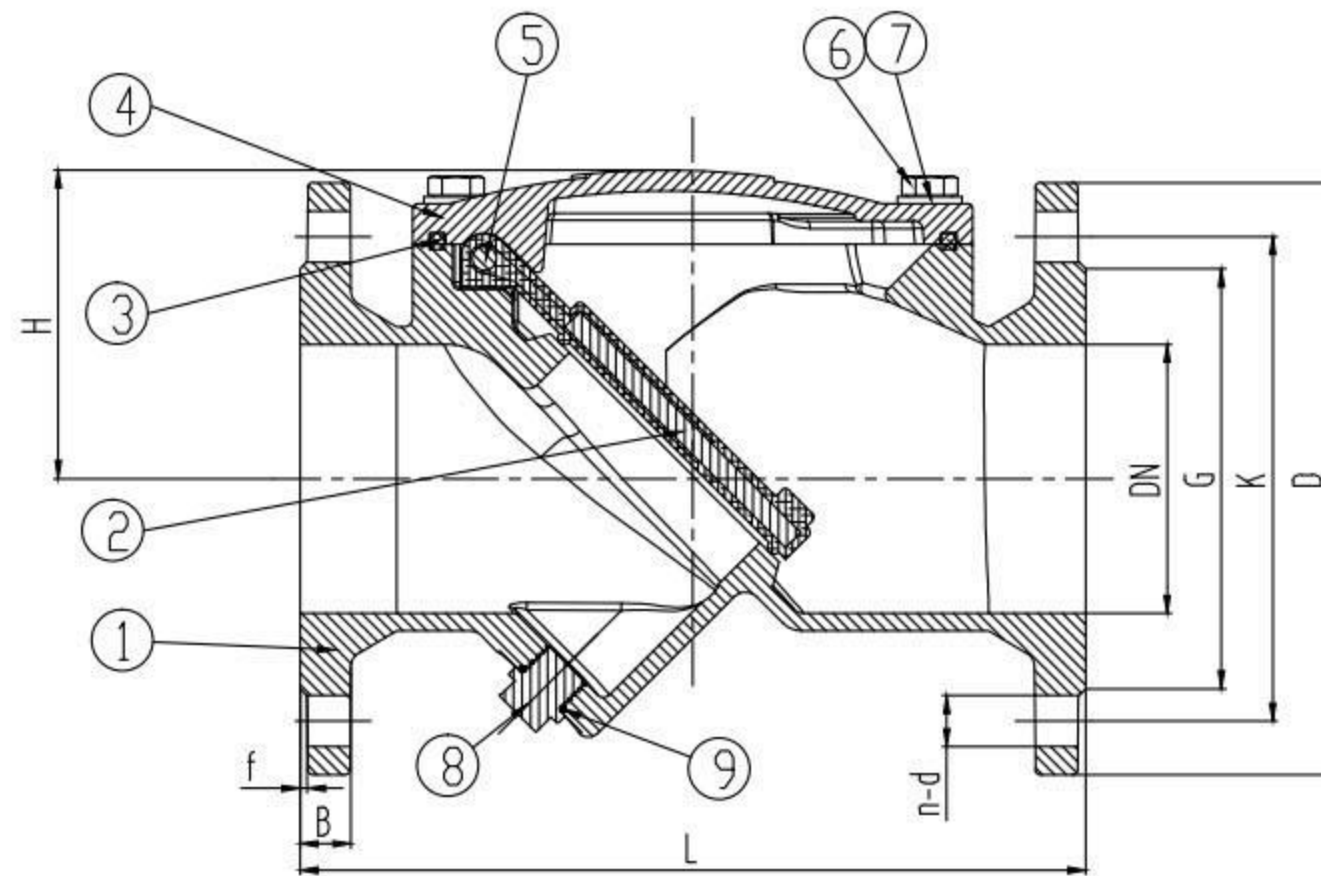

Reference Standard	
Drive Form	Self-motion
Medium	Water
Temperature	0-80℃
Seal Test	11/18 Bar
Body Test	15/24 Bar
PN	10/16 Bar
DN	DN50-700

DN	OUTLINE mm				END FLANGE EN1092-2 PN10/16 mm							
	L	B	f	H	PN10				PN16			
					D	K	G	n-d	D	K	G	n-d
50	200	19	3	82.5	165	125	99	4-019	165	125	99	4-019
65	240	19	3	92.5	185	145	118	4-019	185	145	118	4-019
80	260	19	3	100	200	160	132	8-019	200	160	132	8-019
100	300	19	3	110	220	180	156	8-019	220	180	156	8-019
125	350	19	3	125	250	210	184	8-019	250	210	184	8-019
150	400	19	3	143	285	240	211	8-023	285	240	211	8-023
200	500	20	3	170	340	295	266	8-023	340	295	266	12-023
250	600	22	3	300	405	350	319	12-023	405	355	319	12-028
300	700	24.5	4	330	460	400	370	12-0123	460	410	370	12-028

9	O Ring	NBR
8	Plug	AISI304 STAINLESS STEEL
7	Flat Washer	AISI304 STAINLESS STEEL
6	Bolt	AISI304 STAINLESS STEEL
5	Shaft Pin	AISI420 STAINLESS STEEL
4	Bonnet	DUCTILE IRON
3	Bonnet Gasket	NBR
2	Disc	WCB+EPDM
1	Body	DUCTILE IRON
No.	Name	Materials

Assembly Drawing

Rubber Disc Check
Valve