


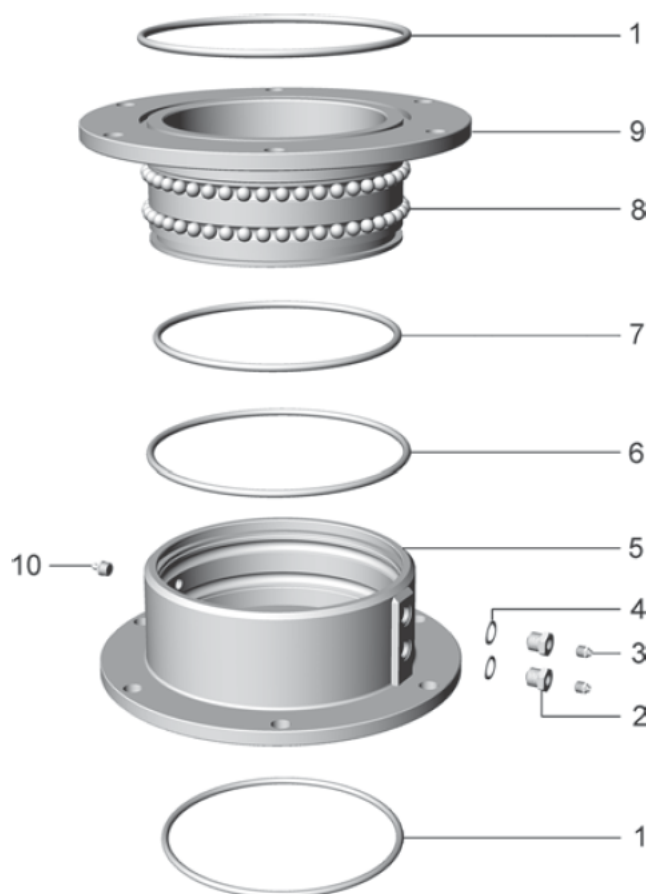

Condizioni di esercizio

Work conditions

DN	4" - 6" - 8" - 10"
P(Bar)	6
P(PSI)	90
T °C	-15 +80

POS.	CODICE / CODE	DENOMINAZIONE	DENOMINATION	MATERIALE	MATERIAL
1	..OR 0240 045 015	OR 207 (Øi 129,54×6,99) 4"	O RING 207 (Øi 129,54×6,99) 4"	GOMMA NBR 70	NBR 70 RUBBER
1	..OR 0700 150 015	OR 233 (Øi 181,00×6,99) 6"	O RING 233 (Øi 181,00×6,99) 6"	GOMMA NBR 70	NBR 70 RUBBER
1	..OR 0700 200 015	OR 244 (Øi 227,97×6,99) 8"	O RING 244 (Øi 227,97×6,99) 8"	GOMMA NBR 70	NBR 70 RUBBER
1	..OR 0700 250 015	OR 252 (Øi 278,77×6,99) 10"	O RING 252 (Øi 278,77×6,99) 10"	GOMMA NBR 70	NBR 70 RUBBER
2	TOZO 0700 100 006	TAPPO 3/8" ES 20	COVER 3/8" ES 20	OTTONE UNI EN 12164	UNI EN 12164 BRASS
3	INGR 0700 100 007	VALVOLINA DI SPURGO	BLEED VALVE	ACCIAIO	STEEL
4	ROAL 0700 100 008	RONDELLA Ø22×17×1,5	WASHER Ø22×17×1,5	ALLUMINIO	ALUMINIUM
5	FGZO 0700 100 002	CORPO FEMMINA 4"	FEMALE BODY (4")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
5	FGZO 0700 150 002	CORPO FEMMINA 6"	FEMALE BODY (6")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
5	FGZO 0700 200 002	CORPO FEMMINA 8"	FEMALE BODY (8")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
5	FGZO 0700 250 002	CORPO FEMMINA 10"	FEMALE BODY (10")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
6	..OR 0240 045 015	OR 207 (Øi 129,54×6,99) 4"	O RING 207 (Øi 129,54×6,99) 4"	GOMMA NBR 70	NBR 70 RUBBER
6	..OR 0700 150 015	OR 233 (Øi 181,00×6,99) 6"	O RING 233 (Øi 181,00×6,99) 6"	GOMMA NBR 70	NBR 70 RUBBER
6	..OR 0700 200 005	OR 245 (Øi 234,32×6,99) 8"	O RING 245 (Øi 234,32×6,99) 8"	GOMMA NBR 70	NBR 70 RUBBER
6	..OR 0700 250 004	OR 250 (Øi 266,10×6,99) 10"	O RING 250 (Øi 266,10×6,99) 10"	GOMMA NBR 70	NBR 70 RUBBER
7	..OR 0700 100 004	OR 197 (Øi 114,70×6,99) 4"	O RING 197 (Øi 114,70×6,99) 4"	GOMMA NBR 70	NBR 70 RUBBER
7	..OR 0700 150 004	OR 228 (Øi 166,70×6,99) 6"	O RING 228 (Øi 166,70×6,99) 6"	GOMMA NBR 70	NBR 70 RUBBER
7	..OR 0700 200 004	OR 242 (Øi 215,30×6,99) 8"	O RING 242 (Øi 215,30×6,99) 8"	GOMMA NBR 70	NBR 70 RUBBER
7	..OR 0700 250 004	OR 250 (Øi 266,10×6,99) 10"	O RING 250 (Øi 266,10×6,99) 10"	GOMMA NBR 70	NBR 70 RUBBER
8	SFAC 0700 100 003	SFERA Ø1/2"	BALL Ø 1/2"	ACCIAIO AL CROMO	CHROME - STEEL
9	FGZO 0700 100 001	CORPO MASCHIO 4"	MALE BODY (4")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
9	FGZO 0700 150 001	CORPO MASCHIO 6"	MALE BODY (6")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
9	FGZO 0700 200 001	CORPO MASCHIO 8"	MALE BODY (8")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
9	FGZO 0700 250 001	CORPO MASCHIO 10"	MALE BODY (10")	GHISA Gs400 UNI EN 1563	Gs400 UNI EN 1563 CAST IRON
10	INGR 0020 100 012	INGRASSATORE 1/4" G	GREASE NIPPLE 1/4" G	ACCIAIO	STEEL