


COD. 21.51

ELECTROFUSION REDUCER

SDR 11 - PN 16

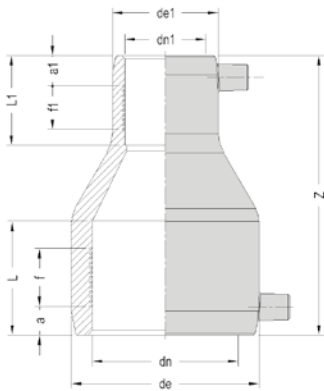

■ in preparation

DIMENSIONS											WEIGHTS
dn	dn1	de	de1	L	L1	f	f1	a	a1	Z	
25	20	37	32	40	40	21	23	10	10	86	■
32	20	44	32	46	38	34	22	10	10	105	61
32	25	45	36	44	45	31	21	10	10	103	63
40	20	55	33	49	39	27	22	11	10	120	83
40	25	55	36	48	40	27	21	11	10	114	84
40	32	55	44	54	50	30	29	11	10	109	85
50	25	67	37	49	40	27	21	12	10	126	120
50	32	66	44	53	49	30	29	12	10	121	122
50	40	66	54	55	54	33	33	12	11	119	126
63	32	81	46	62	44	31	24	15	12	156	187
63	40	81	54	63	54	29	20	15	13	137	198
63	50	81	66	62	54	26	23	16	16	131	218
75	50	97	68	70	55	34	29	18	18	154	365
75	63	97	81	75	62	34	33	13	13	160	405
90	50	117	66	79	55	45	25	18	16	185	555
90	63	115	81	77	62	45	33	15	13	160	515
90	75	115	97	81	60	39	30	18	18	159	550
110	63	144	83	79	63	40	33	20	15	201	905
110	90	141	115	87	77	41	39	19	18	181	860
125	90	162	118	78	68	42	34	22	17	177	1100
125	110	162	144	79	73	33	36	22	20	164	1225
160	90	209	119	90	79	50	50	23	17	233	2340
160	110	208	144	95	82	48	37	25	20	218	2400
160	125	208	162	98	87	47	30	26	21	208	2505
180	125	229	165	103	79	46	39	29	15	254	3140
200	160	254	228	110	96	45	38	35	29	265	4000

WELDABILITY ON PIPE/FITTING PE 100			
dn	dn1	SDR 17	SDR 11
25	20		● ▲
32	20		● ▲
32	25		● ▲
40	20		● ▲
40	25		● ▲
40	32	● ▲	●
50	25		● ▲
50	32	● ▲	●
50	40	● ▲	●
63	32	● ▲	●
63	40	● ▲	●
63	50	●	●
75	50		●
75	63		●
90	50	●	●
90	63	●	●
90	75	●	●
110	63		●
110	90	●	●
125	90	●	●
125	110	●	●
160	90	●	●
160	110	●	●
160	125	●	●
180	125	●	●
200	160	●	●

- weldable only with universal ef units
- weldable only with monovalent welding units Series Euro
- ▲ minimum weldable thickness 3 mm

_ Moulded in PE 100-RC

- _ Absolutely compulsory the use of aligning clamp for all diameters
- _ Absolutely compulsory the pipes/fittings scraping